

SearchLight – A Lightweight Search Function for Pervasive Environments

Andreas Butz, Michael Schneider, Mira Spassova
Department of Computer Science, Saarland University,
Stuhlsatzenhausweg, Bau 36.1, 66123 Saarbrücken, Germany
{*butz,mschneid,mira*}@cs.uni-sb.de

ABSTRACT

We present a lightweight search function for physical objects in instrumented environments. Objects are tagged with optical markers which are scanned by a steerable camera and projector unit on the ceiling. The same projector can then highlight the objects when given the corresponding marker ID. The process is very robust regarding calibration, and no 3D model of the environment is needed. We discuss the scenario of finding books in a library or office environment and several extensions currently under development.

Introduction

Ubiquitous computing landscapes extend our physical surroundings by a computational layer providing new functionalities. One such functionality can be the capability of objects to make themselves known in order to be noticed or found by humans. This functionality was already proposed in the original Ubiquitous Computing vision [6]. A search function for physical environments would alleviate the need to keep track of all of the things in our environment.

One obvious application is keeping track of books in our office, in a library or a book store. Let's think of a library with ubiquitous display capabilities. Let's assume there will still be a conventional inquiry terminal to find out about books. The inquiry interface on the computer terminal in a library could then just provide an additional "show me" button for the selected book, which prompts the environment to highlight its position on the shelf.

Let's think of an instrumented office in which there are many books and other things, either neatly sitting on the shelf where they belong, or left somewhere in the room on a pile. A physical search functionality will find and highlight missing objects for us, no matter where we left them. In this paper we describe such a search function for physical objects, and how it was implemented in our instrumented environment.

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. To copy otherwise, or republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee.

MU3I 2004, Workshop on Multi-User and Ubiquitous User Interfaces, January 13, 2004 at IUI/CADUI 2004, www.mu3i.org

The SUPIE environment

The Saarland University Pervasive Instrumented Environment (SUPIE) is an instrumented room with various types of displays, sensors, cameras, and other devices. By means of a steerable projector, the room has continuous display capabilities which are limited in resolution and temporal availability (only one area at a time). The various other displays provide islands of higher resolution and interactivity within this display continuum. The projector can project arbitrary light



Figure 1: The steerable projector mounted on the ceiling (top) and one corner of SUPIE with a book shelf (bottom)



Figure 2: Images taken during the scanning process (left) and an example of an AR Toolkit marker (right)

patterns onto all surfaces in the room with line of sight to its position in the center of the ceiling. An attached camera can take high resolution pictures from (almost) the same position and scan them for objects and markers. It also provides a low resolution video stream in real time for the recognition of movements.

Implementation of *SearchLight*

General Thoughts

All that is needed to implement *SearchLight* is the steerable projector with its camera and the capability to recognize optical markers. The only determining factors for finding objects and highlighting them, are the pan and tilt angles of the unit moving the projector. If a marker is found at given pan and tilt angles, these can be stored and used directly for projecting a highlight area around the corresponding object. Thus, not even a 3D model of the room is needed. Absolute registration errors of the camera and projector will cancel each other out since they are mounted in one unit and moved together.

Devices

The steerable projector is mounted on a moving yoke produced by a stage equipment manufacturer, controlled via a DMX interface, and mounted in the center of the ceiling of the room. The unit carries a 3.000 ANSI lumen projector with a lens of long focal length, in order to provide sufficient contrast and brightness in daylight. The camera attached to the projector (see figure 1 right) is a regular Digicam with an image resolution of four Megapixels. The high resolution pictures are triggered and read out over USB with the camera's freely available SDK. Each object that should be found by *SearchLight* is tagged by an AR Toolkit marker (see [1]). Each marker has a large black fringe and an individual small black symbol on a white background. (See figure 2) These markers are recognized by the Java version of AR Toolkit.

Implementation

SearchLight performs two main tasks: It *scans* the room for markers and memorizes the corresponding angles, which are

used later to *show* searched objects.

Scan The room is scanned by taking slightly overlapping pictures in all horizontal and vertical directions (see Fig. 2 left). Each picture is analyzed using JAR Toolkit. Marker IDs are stored in a list together with their pan and tilt angle, derived from their position and orientation in the picture and the orientation of the moving yoke when taking the picture.

Show After the room has been scanned, the user can search for marked objects. The object's Marker ID is looked up and the projector unit moves to the position where this marker was detected during the last scan and projects a bright spot around the searched object.

Related Work

The use of a steerable projector to transform environments into continuous displays has first been proposed by Claudio Pinhanez [2] at IBM. In their Siggraph 2001 emerging technologies demo, where colored M&Ms were composed by visitors to form large pixel images, the Everywhere Display Projector was used to highlight trays with different colors on a shelf. The positions of these trays were, however, not acquired automatically. Additional applications are presented in [3], including a ubiquitous product finder and an interactive shelf. The product finder guides people towards products in a store environment, using blank projection surfaces as individual direction signs and interaction spaces. The interactive shelf uses similar surfaces for the display of product-related information. While these prototypes are strongly related to the work presented here, both of them require dedicated projection space in the environment. Raskar et al. present in [4] a method for simultaneous acquisition of room geometry and use of the acquired surfaces as an output medium for mobile projectors. They also use markers for object recognition and annotation, but rely on the user pointing to the right direction. In our demo, the environment actively controls the projector.

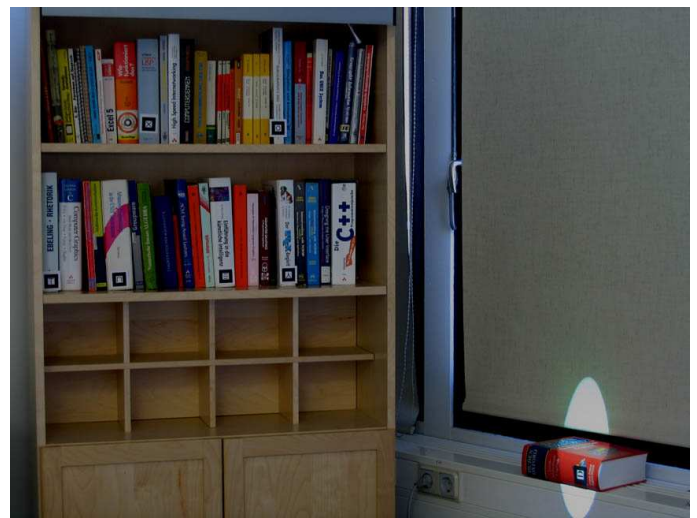


Figure 3: A book was found on the shelf (left) and another one on the window sill (right)

Current Results and Future Work

With our experimental setup in SUPIE (room size 5x6m, shelf on the wall, 4 Megapixel steerable camera with 3x optical zoom in the center of the ceiling) we were able to reliably recognize markers down to a size of 10mm in the whole room. Initial scanning of the room took roughly 1 hour, mostly due to the slow transmission of pictures over the USB 1.1 link to the camera. Currently we are improving *SearchLight* in various respects.

Continuous Model Update

In the current demo, scanning is done only once when *SearchLight* is started. In the future we will use idle times of the projector to systematically re-scan the room for changes. This process will also prioritize regions where changes are more likely by using additional sensors, such as RFID tags or motion detection with other cameras. On the down side, including external sensors will require the use of at least a simple 3D model of the room in order to relate locations of sensor events to pan and tilt angles of the projector. This model might, however, be acquired automatically by methods similar to those described in [5]. Upcoming versions of *SearchLight* may use the camera even when the projector is used for other tasks by just analyzing images as they appear rather than actively steering the camera to certain positions for scanning.

Extension to Other Markers

In theory, existing bar codes on many products could be used for the recognition process. In the case of books, OCR could even eliminate the need for markers altogether, since book spines and covers are designed to clearly identify books. Currently, we are working on integrating RFID tags by watching the region around the RFID antenna. When the antenna registers a change in its field, a new image is taken and the exact position of the new resp. removed object is identified from a difference image. As a side effect the exact silhouette of the

object might be obtained for highlighting by the projector.

Fuzzy Search Results

Sometimes the exact position or dimension of a searched object may not be known, for example if the object within an RFID antenna field could not be located unambiguously by the difference image. In this case, the fuzzy search result can be visualized as a spot whose diameter reflects the amount of uncertainty.

REFERENCES

1. M. Billinghurst, S. Weghorst, and T. Furness. Shared space: An augmented reality approach for computer supported collaborative work. *Virtual Reality*, 3(1):25–36, 1998.
2. C. Pinhanez. Using a steerable projector and a camera to transform surfaces into interactive displays. In *Proc. ACM CHI 2001*, Seattle, Washington, USA, March 31 - April 5 2001. ACM Press.
3. C. Pinhanez, R. Kjeldsen, A. Levas, G. Pingali, M. Podlaseck, and N. Sukaviriya. Applications of steerable projector-camera systems. In *Proceedings of the IEEE International Workshop on Projector-Camera Systems at ICCV 2003*, Nice Acropolis, Nice, France, October 12 2003. IEEE Computer Society Press.
4. R. Raskar, J. van Baar, P. Beardsley, T. Willwacher, S. Rao, and C. Forlines. ilamps: Geometrically aware and self-configuring projectors. In *ACM SIGGRAPH 2003 Conference Proceedings*. ACM Press, 2003.
5. R. Raskar, G. Welch, M. Cutts, A. Lake, L. Stesin, and H. Fuchs. The office of the future: A unified approach to image-based modeling and spatially immersive displays. In *Proc. ACM SIGGRAPH '98*, pages 179–188, 1998.
6. M. Weiser. The computer for the 21st century. *Scientific American*, 3(265):94–104, 1991.